

TREBLE R FABRICATIONS

UNIT 42 – CROSSGATE ROAD – PARK FARM INDUSTRIAL ESTATE – REDDITCH – WORCS – B987SN

tel 01527 503 303 – fax 01527 503 325 – web www.treblefabrications.co.uk

RPC PLASTIC SCUMBOARDS

Many settlement and distribution tanks require the need to separate the scum from the clear water and most tanks will require a weirplate and scumboard located on it perimeter.

Scumboards are also often used as a Barrier/Baffle.

Our range of Scumboards are manufactured from a RPC plastic material specifically designed for use with this equipment. This material has advantages over the traditional GRP as follows: -

1. Recycled polycarbonate is environmentally sound
2. RPC is virtually unbreakable
3. RPC will not splinter during drilling
4. No need to seal the edges after trimming
5. Thickness range available 5, 6 and 8
6. RPC offers good weather resistance
7. RPC is light in weight with a specific gravity of 1-2
8. Specified by the major water companies



Scumboards are located on Wall-Mounting Brackets, 150 mm inwards from the Weirplates.

Other outreaches available on request.




RPC PLASTIC SCUMBOARDS

SCUMBOARD TYPE 1 TO SUIT CIRCULAR TANKS

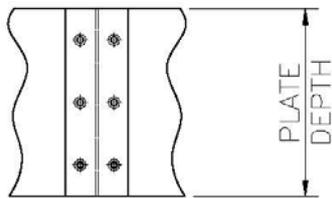
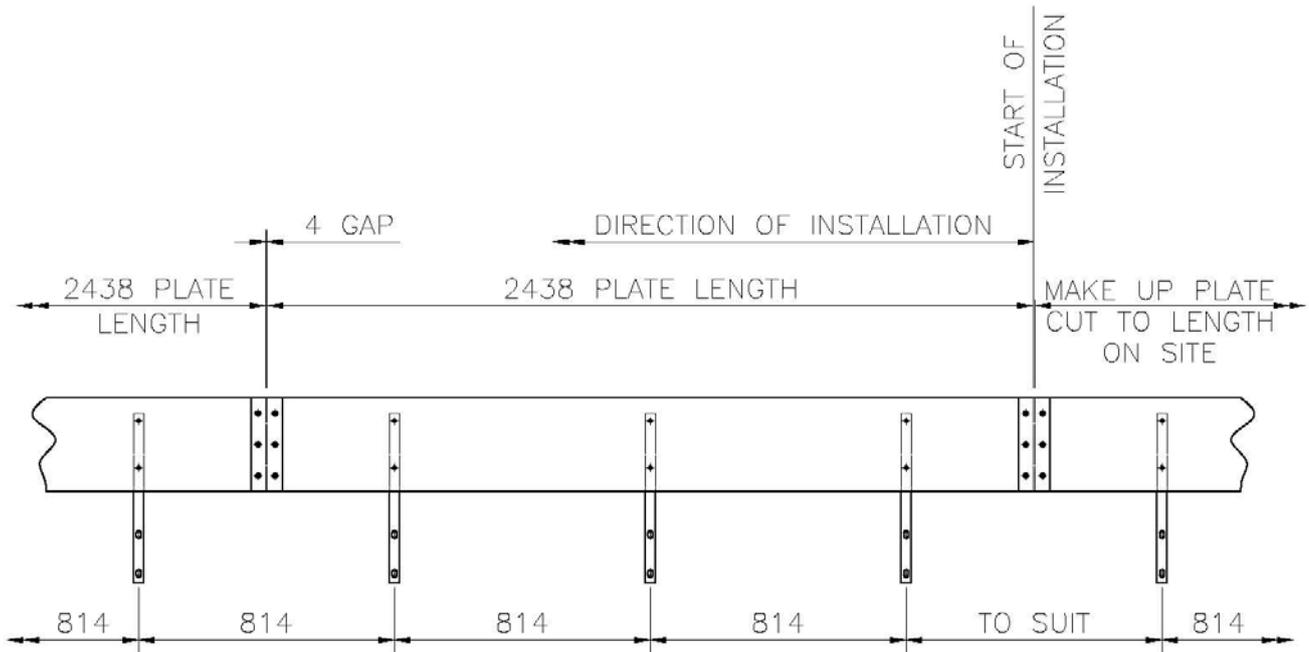


JOINING PLATE
DETAILS

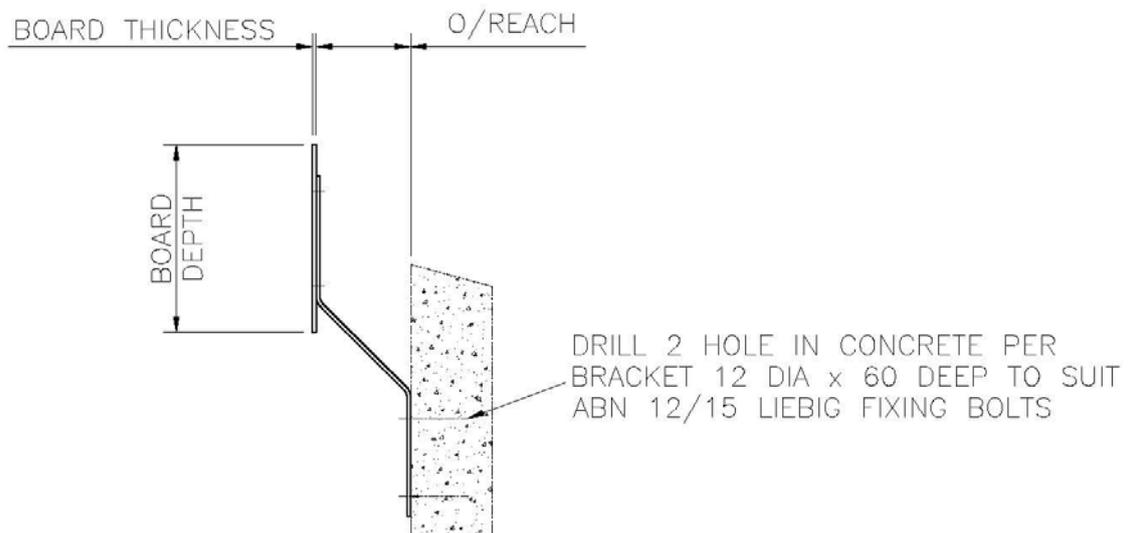


SIDE VIEW

SCUMBOARD TYPE 2 TO SUIT RECTANGULAR TANKS

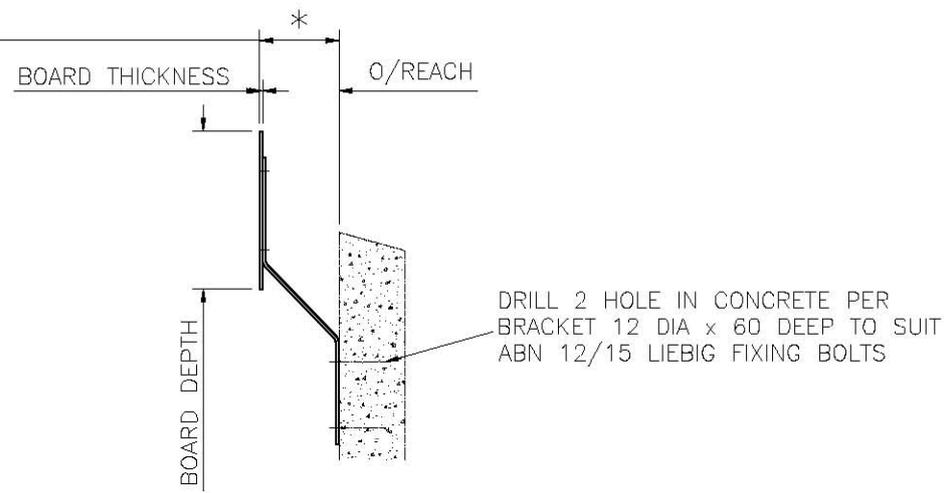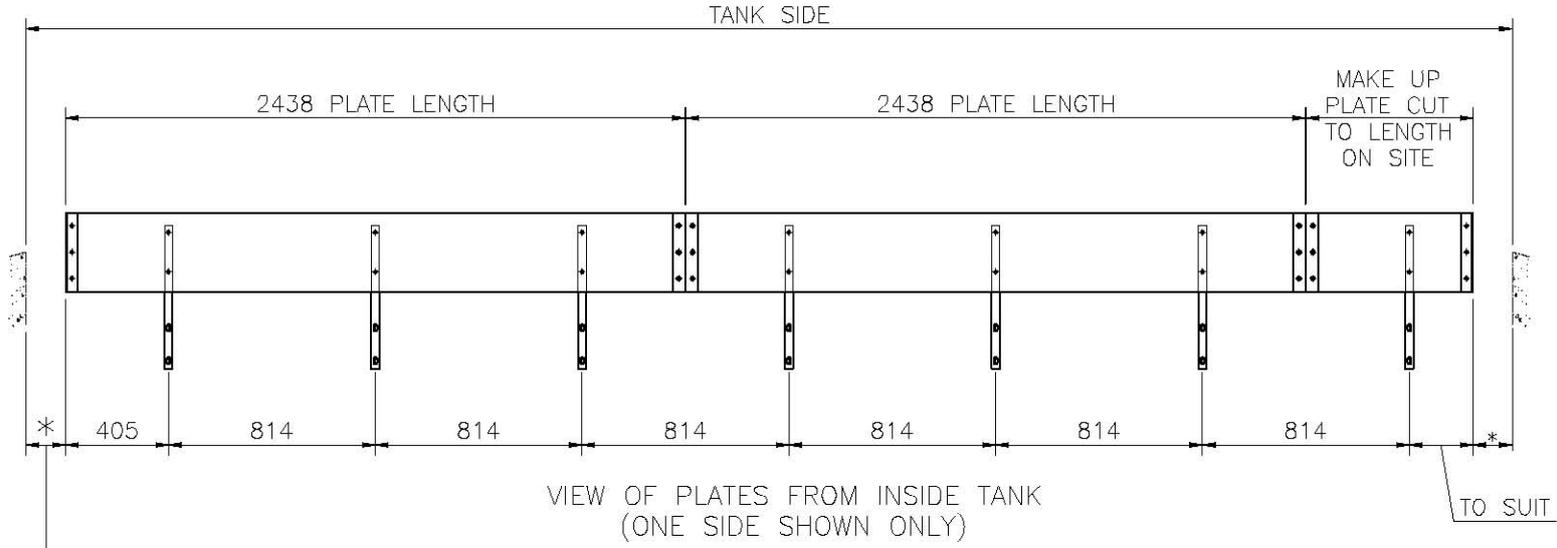


SIDE VIEW




JOINING PLATE
DETAILS

SCUMBOARD TYPE 3 TO SUIT TANK ENDS

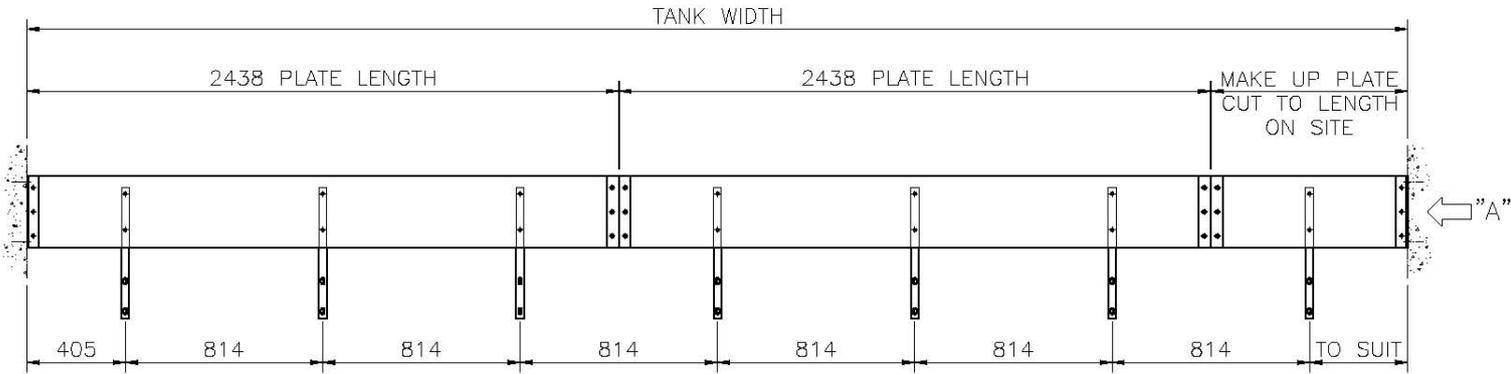


STAINLESS STEEL
C'SNK SCREWS



JOINING PLATE
DETAILS


DRILL 2 HOLES IN CONCRETE EACH
END 12 DIA x 60 DEEP TO SUIT
ABN 12/15 LIEBIG FIXING BOLTS



VIEW ON
ARROW "A"

BOARD THICKNESS

O/REACH



DRILL 2 HOLE IN CONCRETE PER
BRACKET 12 DIA x 60 DEEP TO SUIT
ABN 12/15 LIEBIG FIXING BOLTS

SIDE VIEW