

TREBLE R FABRICATIONS

UNIT 42 – CROSSGATE ROAD – PARK FARM INDUSTRIAL ESTATE – REDDITCH – WORCS – B987SN

tel 01527 503 303 – fax 01527 503 325 – web www.treblefabrications.co.uk

SLUDGE VALVES

Sludge Valves are usually used in Water Treatment Works to discharge the sludge and wastewater in reservoirs. Generally available in grade 304/316 Stainless Steels or Painted Mild Steel.



SLUDGE VALVES

SLUDGE VALVES

Operating Duty

Application : **Flow Control and Isolation**

Type of Mounting : **Floor and Pipe**

Type of Media : **Water and Sewage**

Operation Head : **10m On / Off Seating**

Options

Mounting : **Tank Beds**


Operation : **Sq Cap or Handwheel**

Size Range : **Any size from 80mm up to 450mm**

Construction Materials

Item	Description	Material
1	Body	MS, 304ss or 316ss
2	Door / Disc	MS, 304ss or 316ss
3	Sealing Face	Gun Metal
4	Lifting Handle	MS, 304ss or 316ss
5	Support Bracket	MS, 304ss or 316ss
6	Construction Screws	A4
7	Bridge	MS, 304ss or 316ss
8	Spindle	304ss or 316ss
9	Handwheel	Aluminium

TYPICAL DETAILS OF A SLUDGE VALVE

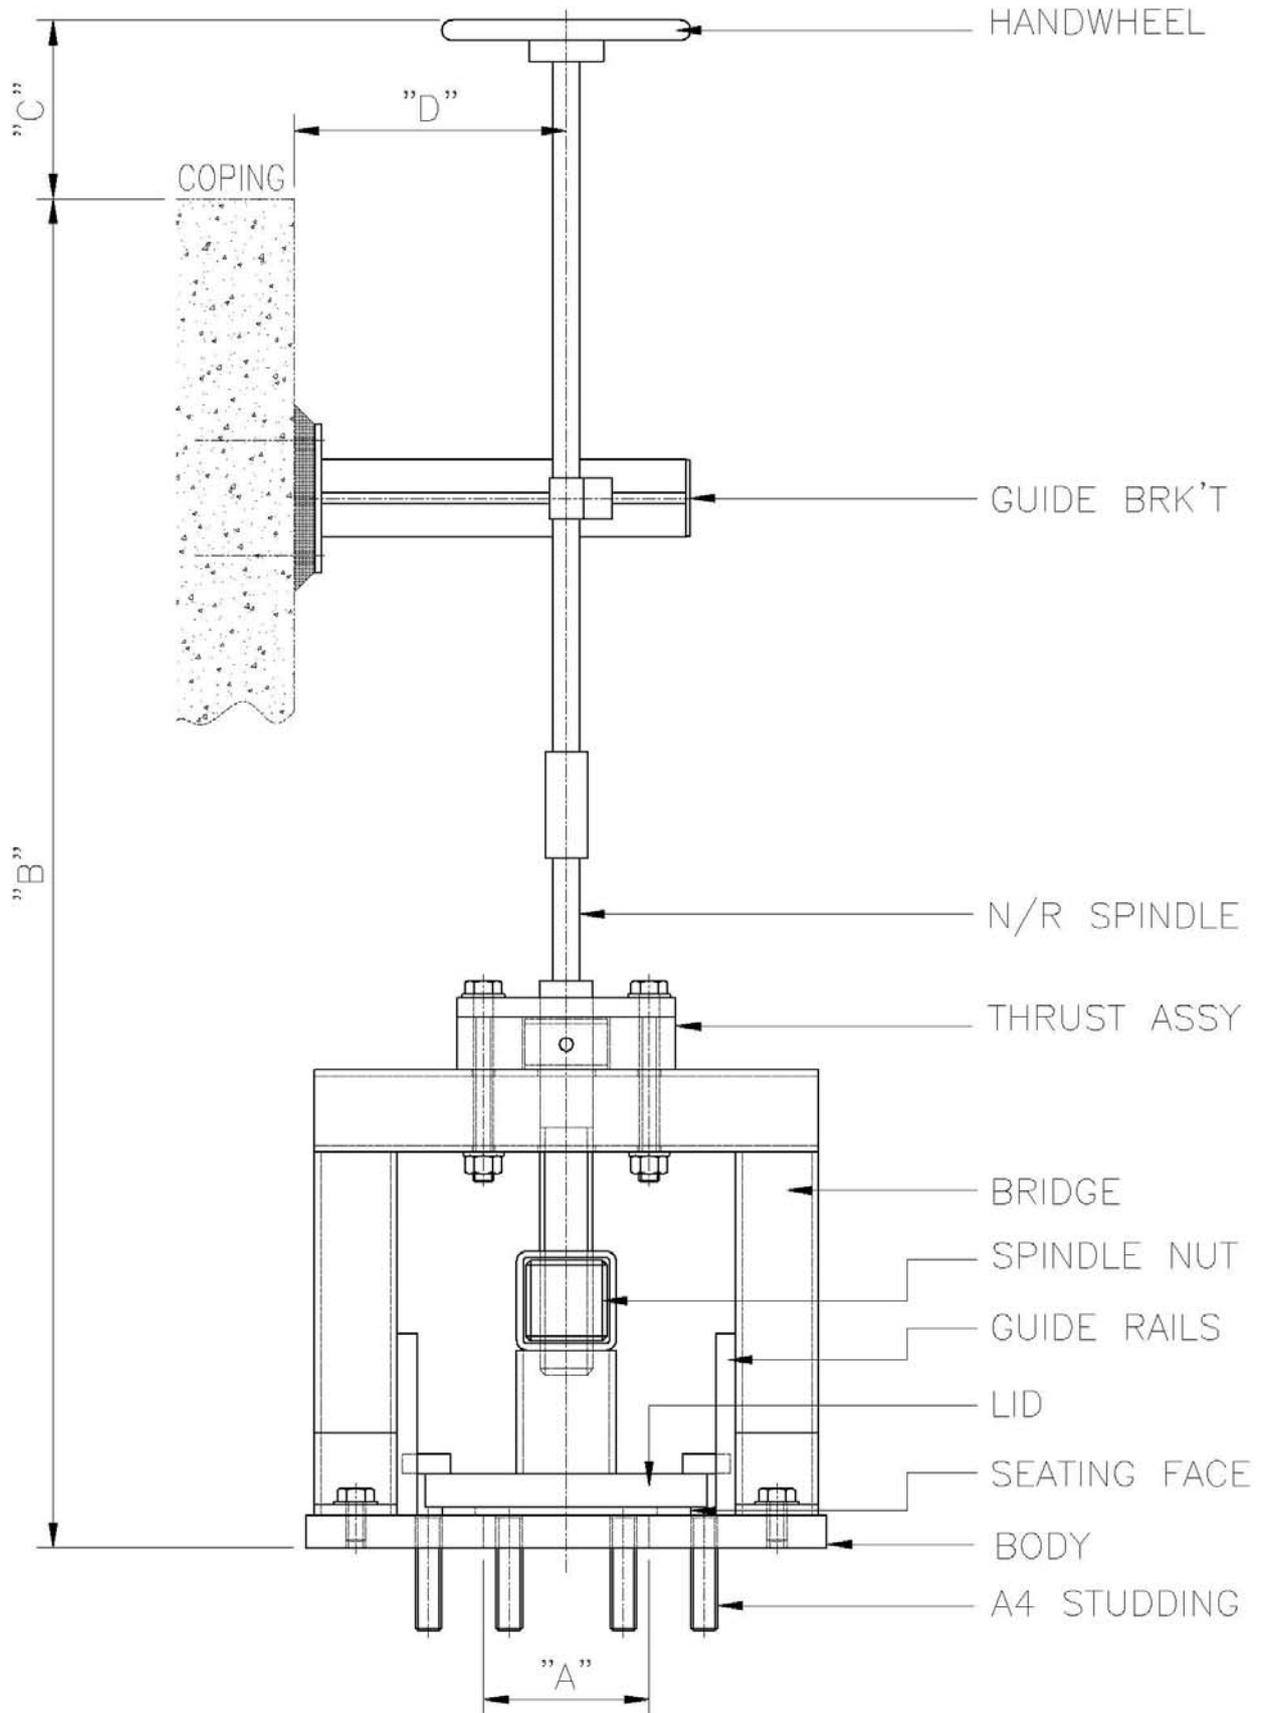

DIMENSIONS "A", "B", "C" AND "D" IDENTIFIED AT QUOTATION STAGE